


GROUND TO DECK LADDER INSTRUCTIONS

Assemble the four steps to your ladder side rails using the (16) # 14 x 1" self tapping hex head screws. Insert the screws through the ladder side rails and tighten securely to the screw receiver on the underside of the steps.

Slide the two hinge connectors into the slots on the rear side of the top step.

Place the top step on top of the ladder side rails and aligning the holes, insert the (2) 1/4 x 20 x 1/2" long truss head screw through the hinge connector, top step, and the ladder side rails. Fasten with the (2) 1/4 x 20 hex nuts from underneath the top step.

Repeat this procedure for the front of the top step only inserting the screws through the top step and the ladder side rail.

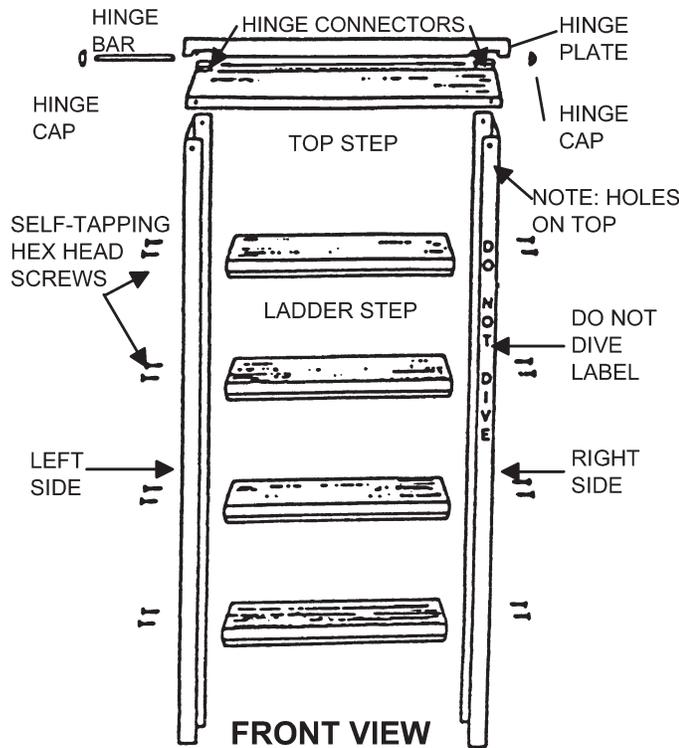

Attach the two handrails to the ladder side rails. Mark the four holes in the side rail and drill through the side rail using a 5/16" drill bit.

Insert the plastic caps over each end of the handrails and attach the handrails to the side rail using the (4) 1/4 x 20 x 2" screws and nuts on each handrail.

Attach the hinge plate to the ladder by inserting the hinge bar through the hinge plate and the two hinge connectors assembled onto the ladder.

Using a hammer gently tap on the two hinge caps onto the exposed ends of the hinge bar.

Position the ladder on the deck. Drill through the hinge plate and the face of the deck using a 5/16" drill bit and attach the ladder to the deck using (2) 1/4 x 20 x 1/2" screws and nuts provided.


Attach the two remaining hand rails to the outside of the two long posts along side the ladder by marking the two holes and drilling through the post using a 5/16" drill bit.

Insert the plastic caps over each end of the handrail and assemble the handrails to the post using the (2) 1/4 x 20 x 3" truss head screws and nuts on each handrail. Position these handrails so that a "HAND HOLD" is accessible from the bottom of the ladder to the top.

YOUR DECK SHOULD BE SECURED TO THE GROUND IN THE EVENT OF ANY STRONG WIND OCCURRENCES.


This may be easily done by driving tent stakes into the ground firmly catching the Bottom Support Channels near each Post.

If supplied, assemble your In-Pool Ladder according to the instructions packed in it's carton.

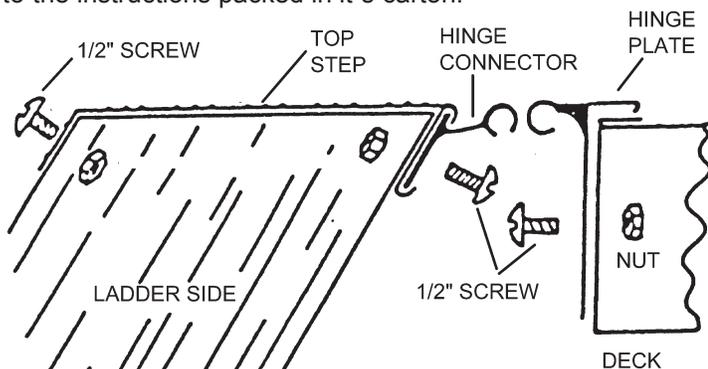

Two "DO NOT DIVE" warning labels are pre-applied to the ladder side rails. Point out these warnings to all users of the pool.

HAND RAILS ATTACHED TO POSTS

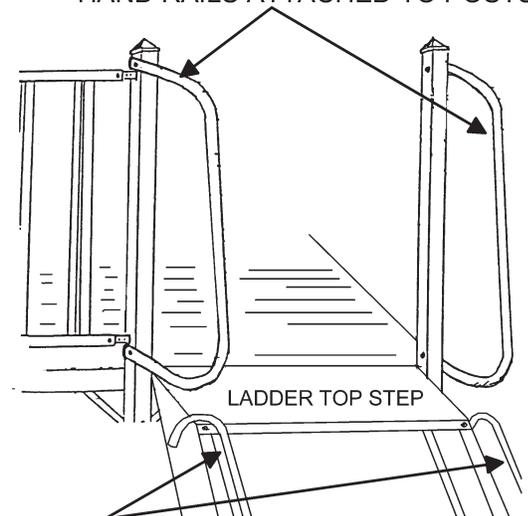

OUTSIDE VIEW